



# RADIANT™

## SELF SEALING, FAST RECOAT, VARIABLE UHS FLOOR FINISH

### PRODUCT DESCRIPTION:

Radiant™ is specially formulated to provide optimal performance with high speed and ultra high speed programs but works well with any maintenance system. The high solid acrylic blend provides exceptional durability, gloss and black heel resistance.

### FEATURES:

#### Balance of Performance:

Radiant™ has proven performance on initial laydown, repairability and removability making floor care easy.

#### Repairability:

Maintaining a high appearance level in the toughest traffic conditions is a cinch. Just clean and burnish and Radiant™ keeps coming back.

#### Detergent Resistance:

Radiant™ stands up to repeated autoscrubbing. It takes a lot of abuse before it needs a recoat or strip out.

#### Removability:

Even after repeated scrub and recoat cycles, Radiant™ is easily removed from the floor. Radiant™ takes the risk out of floor care and controls your floor care cost.

### PRODUCT SPECIFICATIONS:

pH	8.6
Appearance	Off White Liquid
Fragrance	Polymeric
Freezing Point	About 32°F
% Solids	20.5 ± 0.5
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage	1800 to 2200 sq. ft. per gallon (may vary due to differences in porosity of the surface)

**Slip Resistance:** Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82


### INGREDIENTS:

Water	.7732-18-5
Styrene acrylic polymers	.Mixture
Diethylene glycol monoethyl ether	.111-90-0
Tri butoxyethyl phosphate	.78-51-3
Polypropylene emulsion	.Mixture

### PRODUCT AVAILABILITY:

9615.....2/2.5 gal

### END-USE-RATING




0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

# RADIANT™

SELF SEALING, FAST RECOAT, VARIABLE UHS FLOOR FINISH



**USE INFORMATION:** Before applying **Radiant™** remove old sealer/finish using an appropriate Fullpro stripper following label directions. For use on all resilient floors and for sealed wood, cork, terrazzo and concrete floors.

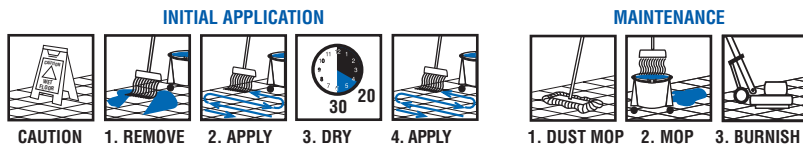

## DIRECTIONS FOR USE:

### INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Fullpro stripper and following label directions.
2. **APPLY** a thin coat of Radiant™ using a clean finish mop.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** 4 coats for best results allowing for adequate drying time between each coat.

### MAINTENANCE

1. **DUST MOP** the floor. Remove gum, labels, and other attached soil deposits with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Fullpro cleaner and following the label directions.
3. **BURNISH** the floor with a high speed machine and appropriate pad. If the floor begins to look worn, an occasional scrub and recoat will decrease the need of frequent stripping.

### FIRST AID:

If in **eyes or on skin**, immediately flush with plenty of water. Get medical attention if irritation persists. If **swallowed**, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

### HANDLING AND STORAGE:

**SUGGESTED STORAGE TEMPERATURE:** Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. **Protect from freezing.** Thoroughly rinse empty containers.

**KEEP OUT OF REACH OF CHILDREN**

### PERSONAL PROTECTION:

**Respiratory Protection:** Not needed under normal conditions.

**Ventilation:** Use with adequate ventilation.

**Eye Protection:** Safety glasses are optional.

**Protective Gloves:** Protective gloves are optional.

**Other Protective Clothing or Equipment:** Wear clothing as necessary to prevent skin contact.

### TRANSPORTATION INFORMATION:

**U.S. DOT - Proper Shipping Name:** Not regulated by DOT.

**Marine Pollutant:** No

DATA SHEET

FULLPRO  
FULLER PROFESSIONAL