



APPEARANCE®

Floor Finish

PRODUCT DESCRIPTION:

Appearance® is a new generation floor finish that achieves maximum performance when maintained by spray buffing and/or high speed buffing. This versatile product provides outstanding response to a variety of equipment/speed/pad combinations to produce excellent results.

FEATURES:

Unique Formulation:

Combination of polymers and synthetic waxes.

Produces "Wet Look":

Used in conjunction with a high speed buffer or burnisher produces gloss, "wet look" floor. Does not powder. Long wearing.

Easy to Maintain:

Superior resistance to scuffing, scratching, and marking. Spray buffing will clean, repair and improve the beauty of the floor.

UL Approved for Slip Resistance:

Resistance: Provides a safe, slip resistant surface.

PRODUCT SPECIFICATIONS:

pH (1:10) @ 25°C	8.6 ± 0.4
Appearance	Off White Emulsion
Fragrance	Acrylic
Freezing Point	About 32°F
% Solids	18.0%
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage	1800 to 2200 sq. ft. per gallon
(may vary due to differences in porosity of the surface)	


INGREDIENTS:

Water	7732-18-5
Ammonia	7664-41-7
Styrene Acrylic Polymer	25085-34-1
Ester of Fumaric Modified Tricyclic-Monocarboxylic Acid	65997-10-6
Diethylene Glycol Methyl Ether	111-77-3
Ethylene Copolymer	67892-91-5

PRODUCT AVAILABILITY:

- 9631.....4/1 gal
- 9635.....2/2.5 gal
- 96355.....1/55 gal drum

END-USE-RATING



0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

DATA SHEET


FULLPRO
FULLER PROFESSIONAL

APPEARANCE® Floor Finish



USE INFORMATION: Appearance® Floor Finish is recommended for use in spray buffing or high speed buffing maintenance programs, on all resilient flooring, tile, terrazzo and clay tile. Not recommended for use on wood floors.

INITIAL APPLICATION

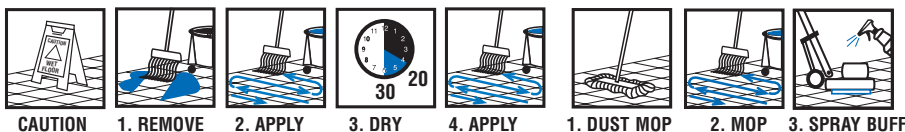

DIRECTIONS FOR USE:

INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Fullpro stripper and following label directions.
2. **APPLY** a thin coat of **Appearance®** using a clean finish mop.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** 4 coats for best results allowing for adequate drying time between each coat.

MAINTENANCE

1. **Dust mop**, damp mop or sweep regularly. Use a neutral cleaner, such as CONCUR.
2. **For best results**, allow **APPEARANCE®** to cure for 24 hours before buffing.
3. **Spray buff** as needed using high speed machine and appropriate pad.

Note: Clean and recoat areas as the foundation becomes thin or as buffing response decreases.

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water. Get medical attention if irritation persists. **If swallowed**, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. **Protect from freezing.** Thoroughly rinse empty containers.

KEEP OUT OF REACH OF CHILDREN

PERSONAL PROTECTION:

Respiratory Protection: Not needed under normal conditions.

Ventilation: Use with adequate ventilation.

Eye Protection: Safety glasses are recommended.

Protective Gloves: Protective gloves are optional.

Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name: Not regulated by DOT.

Marine Pollutant: No



CLEANING TECHNOLOGIES GROUP™