



# APPEARANCE 25

## High Solids Floor Finish

### PRODUCT DESCRIPTION:

**Appearance 25** is a high solids floor finish that provides rapid gloss build with minimal coats. This acrylized formulation produces a clear, color free, high gloss finish that requires little maintenance. **Appearance 25** produces a star-like shine when burnished. For use on vinyl composition, vinyl, rubber, asphalt, concrete, terrazzo, linoleum, rubber and sealed wood floors.

### FEATURES:

#### Durable:

Exceptional resistance to heel marking, scuffing and repeated scrubbing with detergents means that **Appearance 25** outwears conventional finishes. Both stripping and recoating cycles are extended, lowering the frequency of these costly procedures.

#### Superior Soil Resistance:

The tough film of **Appearance 25** minimizes soil penetration and surface abrasion even under extreme conditions. Autoscrubbing easily picks up dirt, immediately restoring the shine.

#### High Solids Formula:

Maximum labor productivity is assured as you build gloss quickly, with fewer coats.

#### Versatility:

Maintain **Appearance 25** using many recognized methods, spray buff, top coat or scrub/recoat.

### PRODUCT SPECIFICATIONS:

pH	9.0 ± 0.3
Appearance	Off White Emulsion
Fragrance	Mild polymeric
Freezing Point	About 32°F
% Solids	25.35 ± 0.35
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage	1800 to 2200 sq. ft. per gallon (may vary due to differences in porosity of the surface)

**Slip Resistance:** Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.


### INGREDIENTS:

Water	7732-18-5
Styrene acrylic copolymer	25987-66-0
Diethylene glycol ethyl ether	111-90-0
Tributoxyethyl phosphate	78-51-3
Polyethylene copolymer	68441-17-8

### PRODUCT AVAILABILITY:

- 9651.....4/1 gal
- 9655.....2/2.5 gal

### END-USE-RATING



0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

DATA SHEET


FULLPRO  
FULLER PROFESSIONAL

# APPEARANCE 25

## High Solids Floor Finish



**USE INFORMATION:** Recommended on all types of resilient and non-resilient floors which include vinyl composition, rubber, asphalt, quarry, terrazzo and sealed wood floors.

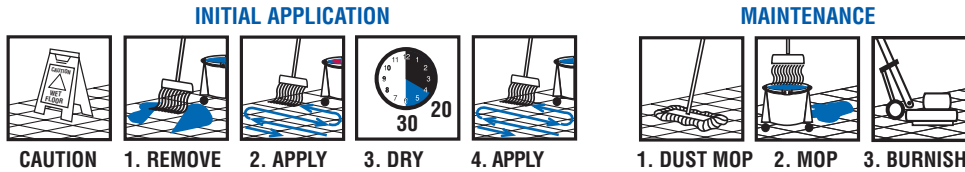

### DIRECTIONS FOR USE:

#### INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Fullpro stripper and following label directions.
2. **APPLY** a thin coat of **Appearance 25** using a clean finish mop.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** 2-3 coats for best results allowing for adequate drying time between each coat.

#### MAINTENANCE

1. **DUST MOP** the floor. Remove gum, labels, and other attached soil deposits with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Fullpro cleaner and following the label directions.
3. **BURNISH** the floor with a high speed machine and appropriate pad.

**SLIP RESISTANCE:** Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM Method D2047-82.

#### FIRST AID:

If in **eyes or on skin**, immediately flush with plenty of water. Get medical attention if irritation persists. If **swallowed**, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

#### HANDLING AND STORAGE:

**SUGGESTED STORAGE TEMPERATURE:** Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. **Protect from freezing.** Thoroughly rinse empty containers.

**KEEP OUT OF REACH OF CHILDREN**

#### PERSONAL PROTECTION:

**Respiratory Protection:** Not needed under normal conditions.

**Ventilation:** Use with adequate ventilation.

**Eye Protection:** Safety glasses are optional.

**Protective Gloves:** Protective gloves are optional.

**Other Protective Clothing or Equipment:** Wear clothing as necessary to prevent skin contact.

#### TRANSPORTATION INFORMATION:

**U.S. DOT - Proper Shipping Name:** Not regulated by DOT.

**Marine Pollutant:** No

CLEANING TECHNOLOGIES GROUP™