



APPEARANCE® MAINTAINER

UHS Maintainer

PRODUCT DESCRIPTION:

APPEARANCE® MAINTAINER is a multi-purpose floor finish maintainer designed for High Speed maintenance programs. It may be used with mop & bucket, or with an autoscrubber. It rejuvenates the finish to produce the wet look and prolongs the life of your finish.

FEATURES:

Maintains A Wet Look Gloss:

Prolongs the finish's life when applied regularly after cleaning.

Dual Use:

Use as a mop-on restorer or as a cleaner in the autoscrubber.

Easy To Apply:

The finish is restored as easy as damp mopping.

"Pops" The Gloss:

The finish gleams after high speed buffing.

PRODUCT SPECIFICATIONS:

pH (concentrate).....	9.55 ± 0.25
Appearance	Milky Light Green
Fragrance	Acrylic
Freezing Point	About 32°F
% Solids	7.3 ± 0.2
Solubility in Water.....	Complete
Flash Point.....	None
Coverage	4,000 to 20,000 sq. ft. per gallon (may vary due to differences in porosity of the surface)

Slip Resistance: Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.

INGREDIENTS:

Water	7732-18-5
Acrylate copolymer.....	25987-66-0
Diethylene glycol momoethyl ether.....	111-90-0
Melamine resin	68002-20-0
Ethylene glycol.....	107-21-1

PRODUCT AVAILABILITY:

- 9701.....4/1 gal

END-USE-RATING



0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico


DATA SHEET

FULLPRO
FULLER PROFESSIONAL

APPEARANCE® MAINTAINER UHS Maintainer



Use Information: Use in hospitals, schools, nursing homes, hotels, motels, municipal buildings and supermarkets where a "wet look" shine is desirable.

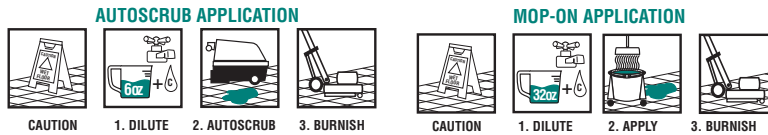

DIRECTIONS FOR USE:

Always dust mop floor first. Remove gum, labels and other attached soil deposits with a putty knife or long handled scraper. For best results preclean the floor with a Fullpro neutral cleaner.

AUTOSCRUB APPLICATION

1. **DILUTE** at 6 ounces per gallon (1:20 ratio) of cool water in the solution tank.
2. **AUTOSCRUB:** Apply solution and scrub with a red or white pad.
Squeegee up excess solution from the floor and allow to dry thoroughly.
3. **BURNISH** as desired to "pop-the-gloss".

MOP-ON APPLICATION

1. **DILUTE** at 32 ounces per gallon (1:4 ratio) of cool water.
2. **APPLY** solution with a clean mop. Change solution when it becomes dirty. No rinsing required. Allow to dry thoroughly.
3. **BURNISH** as desired to "pop-the-gloss".

SLIP RESISTANCE: Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM Method D2047-82.

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water. Get medical attention if irritation persists. If swallowed, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. **Protect from freezing.** Thoroughly rinse empty containers.

KEEP OUT OF REACH OF CHILDREN

PERSONAL PROTECTION:

Respiratory Protection: Not needed under normal conditions.

Ventilation: Use with adequate ventilation.

Eye Protection: Safety glasses are recommended.

Protective Gloves: Protective gloves are optional.

Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name: Not regulated by DOT.

Marine Pollutant: No.

DATA SHEET

FULLPRO
FULLER PROFESSIONAL