

Speedscope®

AMMONIATED WAX STRIPPER

PRODUCT DESCRIPTION:

Speedscope® is a heavy duty ammoniated wax and finish remover. It contains no harsh solvents that can attack the floor. Excellent for stripping and cleaning a wide variety of floors and washable surfaces such as marble, vinyl, vinyl composition, asphalt, rubber, brick, quarry, terrazzo, linoleum and concrete.

FEATURES:

Ideal For Old Floors:

Linoleum, rubber and asphalt floors are stripped clean without discoloring or damaging the floor.

Ideal For Mineral Surfaces:

Will not etch marble or degrade the grouting around brick and quarry tile.

Effective Cleaning:

Natural soap and synthetic components emulsifies hard to remove waxes and soils.

PRODUCT SPECIFICATIONS:

pH	10.9 ± 0.4
Color	Clear Yellow
Physical State	Concentrated Liquid
Fragrance	Ammonia
Freezing Point	About 32°F
Solubility in Water	Complete
Flash Point	None
Viscosity	(400-800 cps)

INGREDIENTS:

Water	7732-18-5
Ammonium hydroxide	1336-21-6
Potassium tallate	61790-44-1
Monoethanolamine	141-43-5
Potassium dodecylbenzene sulfonate	27177-77-1

ECOLOGICAL INFORMATION:

- Biodegradable Surfactants
- Contains No Phosphorus

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE CONCENTRAR	NFPA 3 HMIS	NFPA 0 HMIS	NFPA 0 HMIS
(1:5 RATIO) (1:5 RAZÓN)	NFPA 1 HMIS	NFPA 0 HMIS	NFPA 0 HMIS
(1:32 RATIO) (1:32 RAZÓN)	NFPA 0 HMIS	NFPA 0 HMIS	NFPA 0 HMIS
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderat	Grave	Drástico


DATA SHEET

Speedsope[®] AMMONIATED WAX STRIPPER

DIRECTIONS

USE INFORMATION:

Before stripping always dust mop the floor and remove gum, labels and other attached soil deposits with a long handled scraper or utility knife.

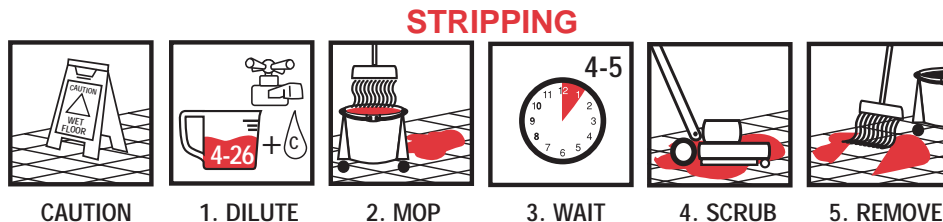

STRIPPING

- 1. DILUTE** at 4 oz. per gallon (1:32 ratio) or up to 26 oz. per gallon (1:5 ratio) of cool water.
- 2. MOP** the diluted solution of Speedsope[®] using a clean mop.
- 3. WAIT:** Let solution work for 5 minutes and do not let dry.
- 4. SCRUB** using a black or brown pad under a swing machine.
- 5. REMOVE** the remaining solution from the floor with a mop or wet vacuum. RINSE and INSPECT the floor for shiny spots. Repeat 2 and 4 if any finish remains on the floor.

SPECIAL PRECAUTIONS: Use caution as floors become very slippery. Must be diluted. Not for use on wood or painted surfaces. Not for use on linoleum or rubber floors or daily maintenance of resilient floors. Before use on asphalt tile, test a small hidden area for any color change.

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water for at least 15 minutes. Get medical attention while removing contaminated clothing and shoes. If inhaled, remove to fresh air. Get medical attention. If swallowed, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. **Protect from freezing.** Thoroughly rinse empty containers. **KEEP OUT OF REACH OF CHILDREN.**

PERSONAL PROTECTION:

Respiratory Protection: Not needed under normal conditions.
Ventilation: Use with adequate ventilation.
Eye Protection: Safety glasses are required.
Protective Gloves: Safety gloves are required.
Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.



TRANSPORTATION INFORMATION:

ONE GALLON OR SMALLER:
Consumer Commodity, ORM-D
LARGER THAN ONE GALLON:
U.S. DOT - Proper Shipping Name: Ethanolamine Solution
Hazard Class: 8
ID Number: UN 2491
Packing Group: III
Marine Pollutant: No

MSDS FAX RETRIEVAL
Read MSDS before using this product

800-551-0101

OBTENCIÓN DE HDSM POR FAX
Leer la HDSM antes de utilizar este producto

FOR CHEMICAL EMERGENCY,
SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT
CALL CHEMTREC DAY OR NIGHT

800-424-9300

PARA EMERGENCIAS QUÍMICA DERRAMES,
ESCAPES, FUEGO, EXPOSICIÓN O ACCIDENTE
LLAMAR DE DÍA O DE NOCHE A CHEMTREC

TECH HOTLINE
800-810-4829
LINEA DE TÉCNICA